


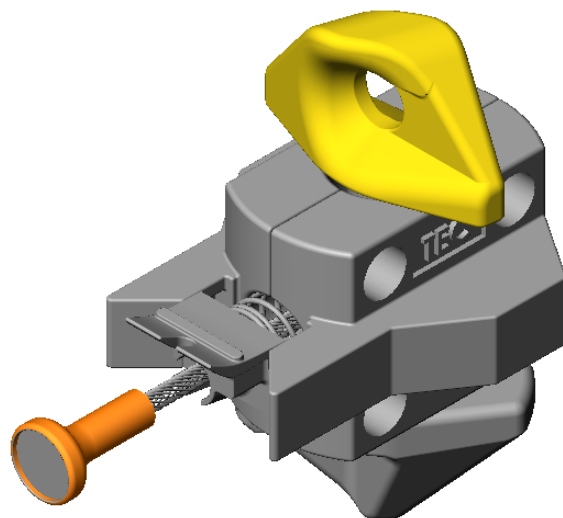

TECHNICAL SPECIFICATION



Min. breaking load tension: 500 kN
Min. breaking load shear: 420 kN

Material
Housing: Ductile iron
Cone: Drop forged

Hot dip galvanized


Manual and semi-automatic mode
(dual function)

Stainless steel components

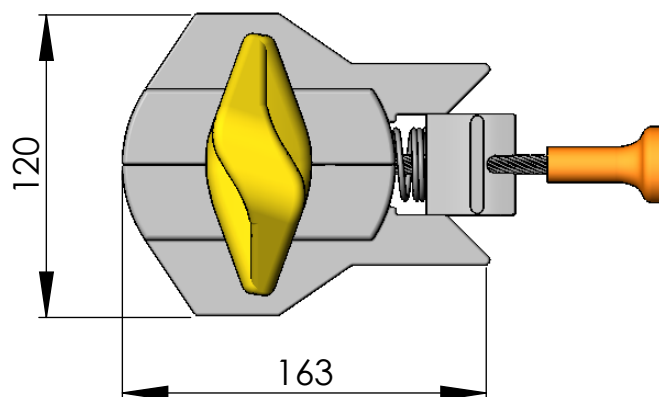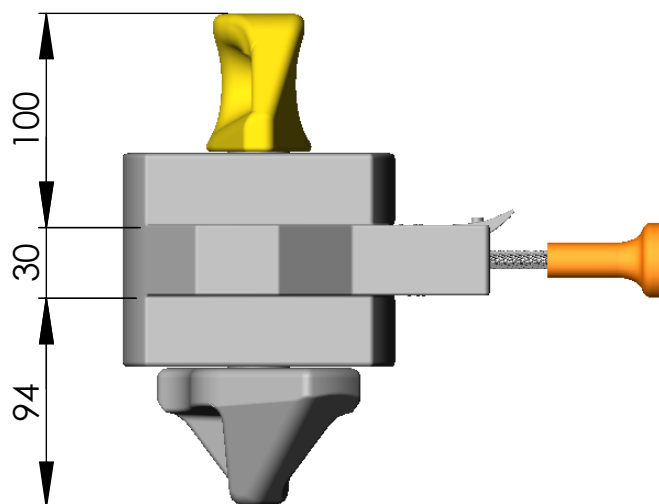

TEC CONTAINER S.A.

Tel: + 34 91 302 16 38
Fax: + 34 91 766 42 79
teccontainer@teccontainer.com
<http://www.teccontainer.com>



**SEMI-AUTOMATIC
TWISTLOC**

CI-45-1